


All dimensions are in millimeters.

METRIC	Thread Size	Type		Thread Code	Head Style	Body Type	End Type	Grip Range e	Install Hole Do +0.15/ +0.05	Shank Dia D -0.03/ -0.10	Head Dia dk +/-0.5	Head Thickness K	Rivet Length L Max	Length After Riveting h Ref.
		Fastener Material												
		Carbon Steel	Stainless Steel											
M4x0.7	SM-B	SMS-B	M4	Thin Head	Semi-Hex	Closed End	0.5-1.0	6.0	6.0	7.0	0.5	15.5	12.5	
	SMK-B	SMKS-B					1.0-2.0					16.5		
M5x0.8	SM-B	SMS-B	M5	Thin Head	Semi-Hex	Closed End	0.5-1.0	7.0	7.0	8.0	0.6	17.5	14.5	
	SMK-B	SMKS-B					1.0-2.5					18.5		
M6x1.0	SM-B	SMS-B	M6	Thin Head	Semi-Hex	Closed End	0.5-1.5	9.0	9.0	10.0	0.6	21.5	17.2	
	SMK-B	SMKS-B					1.5-3.0					23.0		
M8x1.25	SM-B	SMS-B	M8	Thin Head	Semi-Hex	Closed End	0.5-1.5	11.0	11.0	12.5	0.6	25.0	20.5	
	SMK-B	SMKS-B					1.5-3.0					26.5		
M10x1.5	SM-B	SMS-B	M10	Thin Head	Semi-Hex	Closed End	0.5-1.5	13.0	13.0	14.5	0.85	31.5	26.6	
	SMK-B	SMKS-B					1.5-3.0					33.0		

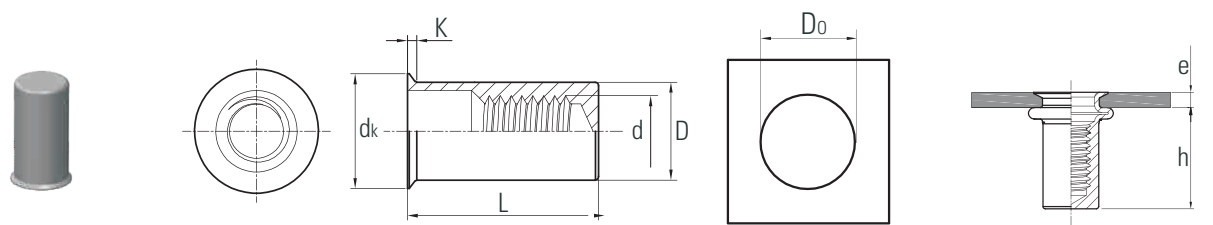

All dimensions are in millimeters.

METRIC	Thread Size	Type		Thread Code	Head Style	Body Type	End Type	Grip Range e	Install Hole Do +0.15/ +0.05	Shank Dia D -0.03/ -0.10	Head Dia dk +/-0.5	Head Thickness K	Rivet Length L Max	Length After Riveting h Ref.
		Fastener Material												
		Carbon Steel	Stainless Steel											
M4x0.7	CM-B	CMS-B	M4	Countersunk Head	Semi-Hex	Closed End	1.6-2.5	6.0	6.0	9.0	1.5	16.3	12.0	
	CMK-B	CMKS-B					2.5-3.5					17.3		
M5x0.8	CM-B	CMS-B	M5	Countersunk Head	Semi-Hex	Closed End	1.6-2.5	7.0	7.0	10.0	1.5	19.5	15.0	
	CMK-B	CMKS-B					2.5-3.5					20.5		
M6x1.0	CM-B	CMS-B	M6	Countersunk Head	Semi-Hex	Closed End	1.6-3.0	9.0	9.0	12.0	1.5	23.5	18.0	
	CMK-B	CMKS-B					3.0-4.5					25.0		
M8x1.25	CM-B	CMS-B	M8	Countersunk Head	Semi-Hex	Closed End	1.6-3.0	11.0	11.0	14.0	1.5	26.5	21.0	
	CMK-B	CMKS-B					3.0-4.5					28.0		
M10x1.5	CM-B	CMS-B	M10	Countersunk Head	Semi-Hex	Closed End	1.6-3.0	13.0	13.0	16.0	1.5	31.5	26.0	
	CMK-B	CMKS-B					3.0-4.5					33.0		