



All dimensions are in inches.

| UNIFIED | Type | Top Board Mounting Hole Diameter Code | Length "L" ± .005 (Length Code is in 32nds of an inch) | | | | | | | | | | B ± .005 | C ± .003 | H ± .005 | P ± .005 | T ± .005 |
|---------|------|---------------------------------------|--|------|------|------|------|------|------|------|------|------|-------------|-------------|-------------|-------------|-------------|
| | | | .250 | .312 | .375 | .437 | .500 | .562 | .625 | .750 | .875 | 1.00 | | | | | |
| DKSSB | | 156 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 28 | 32 | .188 | .226 | .250 | .141 | .020 |

All dimensions are in millimeters.

| METRIC | Type | Top Board Mounting Hole Diameter Code | Length "L" ± 0.13 (Length Code is in millimeters) | | | | | | | | | | B ± 0.13 | C ± 0.08 | H ± 0.13 | P ± 0.13 | T ± 0.13 |
|--------|------|---------------------------------------|---|----|----|----|----|----|----|----|----|-----|-------------|-------------|-------------|-------------|-------------|
| | | | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 25 | | | | | | |
| DKSSB | | 4MM | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 25 | 4.8 | 5.74 | 6.35 | 3.58 | 0.51 | |

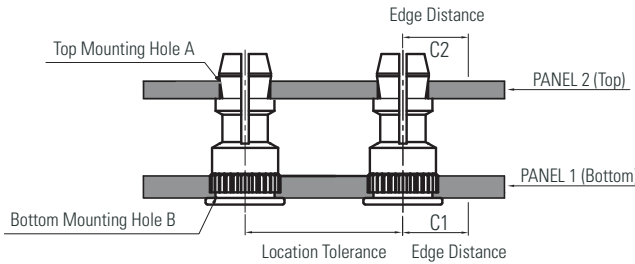

All dimensions are in inches.

TYPE KSSB APPLICATION DATA

| UNIFIED | Type | PANEL 1 (Bottom) | | | | | PANEL 2 (Top) | | | | | |
|---------|------|--------------------------------------|----------|---------------|----------------|-----------------------|-------------------------|-----------------------------------|-------------------|---------------|-----------------|-----------------------|
| | | Bottom Mounting Hole B +.003-.000 | Material | Hardness Max. | Thickness Min. | Edge Distance C1 Min. | Location Tolerance Max. | Top Mounting Hole A +.003-.000 | Material | Hardness Max. | Thickness Range | Edge Distance C2 Min. |
| DKSSB | | .213 | PC Board | HRB 65 | .050 | .220 | ± .005 | .156 | PC Board or Metal | No Limit | .040-.070 | .100 |

All dimensions are in millimeters.

| METRIC | Type | PANEL 1 (Bottom) | | | | | PANEL 2 (Top) | | | | | |
|--------|------|--------------------------------------|----------|---------------|----------------|-----------------------|-------------------------|----------------------------------|-------------------|---------------|-----------------|-----------------------|
| | | Bottom Mounting Hole B +0.08/-0.0 | Material | Hardness Max. | Thickness Min. | Edge Distance C1 Min. | Location Tolerance Max. | Top Mounting Hole A +0.08-0.0 | Material | Hardness Max. | Thickness Range | Edge Distance C2 Min. |
| DKSSB | | 5.4 | PC Board | HRB65 | 1.25 | 5.6 | ± 0.13 | 4.0 | PC Board or Metal | No Limit | 1.0-1.8 | 2.5 |